

ACR1255U-J1 Secure Bluetooth® NFC Reader

R

Technical Specifications V1.07



Table of Contents

1.0.	Introduction	. :
1.1.	Smart Card Reader	
1.2.	Compact Design	
1.3.	Firmware Upgradeable Feature	
1.4.	Secure Bluetooth® Connectivity	
1.5.	Ease of Integration	3
2.0.	Features	. 4
3.0.	Typical Applications	. Ę
	••	
4.0.	Technical Specifications	. (



1.0. Introduction

ACR1255U-J1 Secure Bluetooth® NFC Reader combines the latest 13.56 MHz contactless technology with Bluetooth® connectivity for on-the-go smart card and NFC applications.

1.1. Smart Card Reader

ACR1255U-J1 supports ISO 14443 Type A and B smart cards, MIFARE®, FeliCa, and most NFC tags and devices compliant with ISO 18092 standard. This makes it the ideal device for a broad range of solutions, such as hands-free verification for physical and logical access control, and inventory tracking. ACR1255U-J1 has both Bluetooth 4.0 interface for pairing with mobile devices and USB Full Speed for PC-linked operation. Additionally, it can read/write at the speed of up to 424 Kbps for contactless smart card and NFC device access.

1.2. Compact Design

With a compact design and a rechargeable Lithiumion battery for power, ACR1255U-J1 is extremely portable and convenient for use anytime, anywhere with most Bluetooth-enabled smartphones and tablets in the market.



1.3. Firmware Upgradeable Feature

To save valuable cost and time, the firmware of ACR1255U-J1 could conveniently be upgraded infield to let users cope with the fast-changing technology for their applications to suit different scenarios.

1.4. Secure Bluetooth® Connectivity

With Bluetooth technology and AES-128 encryption (CBC ciphering mode), ACR1255U-J1 can connect securely and wirelessly with ease to any device running on Android™ version 4.3 and later, iOS 5.0 and later, Windows® 7 and later, and Mac OS® 10.7 and later.

1.5. Ease of Integration

ACR1255U-J1 can easily be installed for use with any personal computer running on Windows® operating system because it is PC/SC and CCID-compliant. Its drivers are also compatible with Linux® and Mac OS®.

With its numerous features, the ACR1255U-J1 is the perfect reader for your smart card solution.



2.0. Features

- USB Full Speed Interface
- Bluetooth Interface
- Plug and Play CCID support brings utmost mobility
- Smart Card Reader:
 - Contactless Interface:
 - Read/Write speed of up to 424 Kbps
 - Built-in antenna for contactless tag access, with reading distance of up to 50 mm (depending on tag type)
 - Supports ISO 14443 Part 4 Type A and B cards, MIFARE, FeliCa, and all 4 types of NFC (ISO/IEC 18092) tags
 - Built-in anti-collision feature (only one tag is accessed at any time)
 - Supports AES-128 encryption algorithm (CBC ciphering mode)
 - NFC Mode Supported:
 - Card reader/writer mode
- Application Programming Interface:
 - o Supports PC/SC
 - Supports CT-API (through wrapper on top of PC/SC)
- Built-in Peripherals:
 - o Two user-controllable bi-color LEDs
 - User-controllable buzzer
- USB Firmware Upgradeability¹
- Supports Android[™] 4.3 and later²
- Supports iOS 5.0 and later³
- Compliant with the following standards:
 - o EN 60950/IEC 60950
 - o ISO 14443
 - o ISO 18092
 - o Bluetooth
 - o PC/SC
 - o CCID
 - o CE
 - o FCC
 - o RoHS 2
 - REACH
 - VCCI (Japan)
 - o TELEC (Japan)
 - Microsoft® WHQL

¹ Applicable under PC-linked mode

² Uses an ACS-defined Android Library

³ Uses an ACS-defined iOS Library




3.0. Typical Applications

- e-Government
- e-Healthcare
- e-Purse and Loyalty
- Mobile Banking and Payment
- Network Security
- Access Control
- Public Key Infrastructure



4.0. Technical Specifications

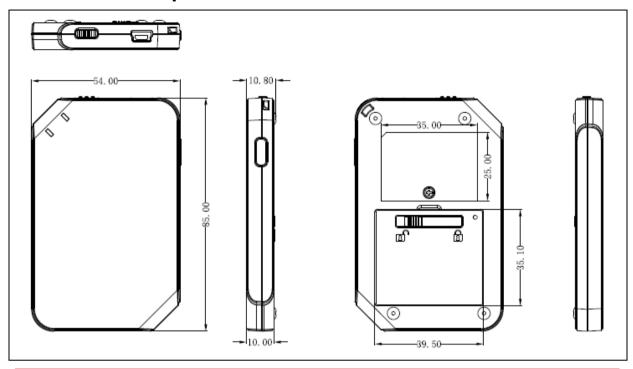

Physical Characteristics

Color White

Bluetooth Interface

Protocol Bluetooth (Bluetooth Low Energy/Bluetooth 4.0)

Power Source......Rechargeable Lithium-ion Battery (charging through USB)

Speed...... 1 Mbps

USB Host Interface

Protocol USB CCID
Connector Type USB Mini-B
Power Source From USB port

Speed......USB Full Speed (12 Mbps)

Supply Voltage 5 V

Contactless Smart Card Interface

StandardISO/IEC 18092 NFC, ISO 14443 Type A & B, MIFARE, FeliCa

......T=CL Emulation for MIFARE Classic, ISO 18092, FeliCa and NFC tags

Operating Frequency 13.56 MHz

Antenna Size...... 45.60 mm × 42.00 mm

Built-in Peripherals

LED 2 bi-color: Red and Blue, Red and Green

Buzzer......Monotone

Other Features

Firmware Upgrade Supported (upgradeable through USB Interface)

Application Programming Interface

PC-linked Mode......PC/SC

Operating Conditions

Temperature 0 °C – 50 °C

Humidity Max. 90% (non-condensing)

MTBF 500,000 hrs



Certifications/Compliance

EN 60950/IEC 60950, ISO 14443, ISO 18092, USB Full Speed, Bluetooth, PC/SC, CCID, CE, FCC RoHS 2, REACH

VCCI (Japan), TELEC (Japan), Microsoft® WHQL

Device Driver Operating System Support

Windows® XP, Windows Vista®, Windows® 7, Windows® 8, Windows® 8.1, Windows® 10 Windows® Server 2003, Windows® Server 2008, Windows® Server 2008 R2, Windows® Server 2012, Windows® Server 2012 R2, Windows® Server 2016 Linux®, Mac OS®, Android™4, iOS⁵







































Android is a trademark of Google Inc.

Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries.

Mac OS is a trademark of Apple Inc., registered in the U.S. and other countries.

Microsoft, Windows, and Windows Vista are registered trademarks of Microsoft Corporation in the United States and/or other countries.

MIFARE, MIFARE Classic, and MIFARE DESFire are registered trademarks of NXP B.V. and are used under license.

The Bluetooth® word, mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Advanced Card Systems Ltd. is under license. Other trademarks and trade names are those of their respective owners

⁴ 4.3 or later Android version is required for Bluetooth 4.0

⁵ 5.0 and later iOS version is required